


CABLE(UT086,RG405,670-086)



With jacket

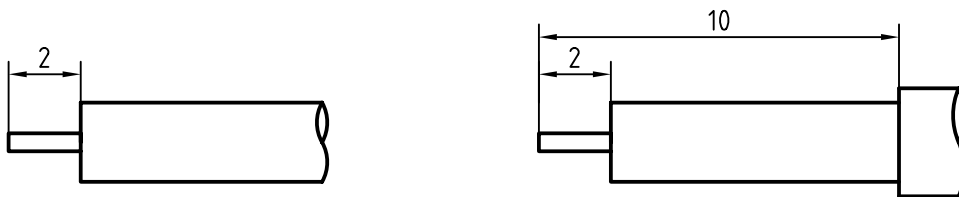

5	1	O ring	Silicon rubber	
4	1	Insulator	PTFE	
3	1	Center contact	Brass/gold plated	
2	1	Coupling nut	Brass/Gold plated	
1	1	Body	Brass/Gold plated	
Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference

Designed by xio xang	Checked by jing lo	Approved by - date jing chan	File name SMA-131200F	Date 06.08.21	Scale 6:1
-------------------------	-----------------------	---------------------------------	--------------------------	------------------	--------------



SMA-131200F

Edition 1.0	Sheet 1/1
----------------	--------------

CHARACTERISTICS

DESCRIPTION:

SMA Type male R/A connector

Electrical data:

Impedance:	50 ohm
Frequency range:	DC to 18 GHz
VSWR:	$\leq 1.10 + 0.02 \times f$ [GHz], DC to 18 GHz
Insertion loss:	$\leq 0.05 \times \sqrt{f}$ [GHz] dB
Insulation resistance:	$\geq 5000M\Omega$
Test voltage:	1000 V rms
Working voltage:	480 V rms
Contact resistance:	
1). Centre contact:	3.0 m Ω
2). Outer conductor:	2.0 m Ω
Power handling(at 20 °C, sea level, VSWR 1.0):	≤ 200 W @ 2 GHz;
RF-leakage	≥ 100 dB up to 1 GHz

- Limitations are possible due to the used cable type -

Environmental data:

Temperature rating:	-65 °C to 165 °C
2002/95/EC (RoHS):	Compliant

Mechanical data:

Mating cycles:	≥ 500
Coupling nut retention	≥ 270 N
Coupling test torque:	≤ 1.1 Nm
Recommended torque:	0.46 Nm to 0.69 Nm

Suitable cables:

UT086, RG405, 670-086