



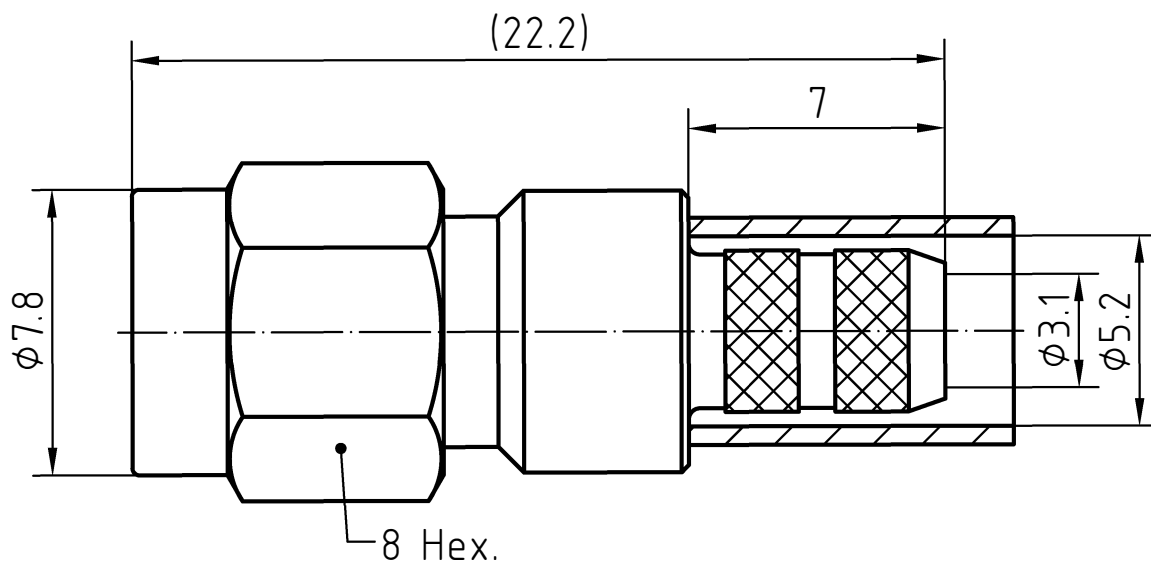

CABLE(LMR200)

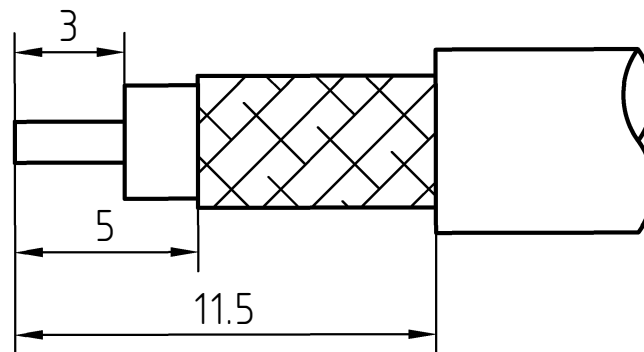

6	1	Ferrule	Copper alloy/Nickel plated	
5	1	O ring	Silicon rubber	
4	1	Coupling nut	Brass/Gold plated	Gold 0.2um over Nickel 2um
3	1	Body	Brass/Gold plated	Gold 0.5um over Nickel 2um
2	1	Insulator	PTFE	
1	1	Center contact	Brass/Gold plated	Gold 0.5um over Nickel 2um
Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference

Designed by
Xio XangChecked by
Jing LoApproved by
Jing ChanFile name
SMA-111100GDate
04.05.23Scale
4:1**RF CONNEC****SMA-111100G**Edition
2.0Sheet
1/1

CHARACTERISTICS

DESCRIPTION:

SMA Type male connector

Electrical data:

<i>Impedance:</i>	<i>50 ohm</i>
<i>Frequency range:</i>	<i>DC to 6.0 GHz</i>
<i>VSWR:</i>	$\leq 1.08 + 0.02 \times f \text{ [GHz]}$
<i>Insertion loss:</i>	$\leq 0.15 \times \sqrt{f \text{ [GHz]}} \text{ dB}$
<i>Insulation resistance:</i>	$\geq 5000 \text{ M}\Omega$
<i>Test voltage:</i>	<i>1000 V rms</i>
<i>Working voltage:</i>	<i>500 V rms</i>
<i>Contact resistance:</i>	
1). Centre contact:	<i>3.0 mΩ</i>
2). Outer conductor:	<i>2.0 mΩ</i>
<i>Power handling</i> (at 20 °C, sea level, V	$\leq 200 \text{ W @ 2 GHz};$
<i>RF-leakage</i>	$\geq 100 \text{ dB up to 1 GHz}$
- Limitations are possible due to	<i>type -</i>

Environmental data:

<i>Temperature rating:</i>	<i>-55 ° C to +165 ° C</i>
<i>2002/95/EC (RoHS):</i>	<i>Compliant</i>

Mechanical data:

<i>Mating cycles:</i>	≥ 500
<i>Coupling nut retention</i>	$\geq 270 \text{ N}$
<i>Coupling test torque:</i>	$\leq 1.1 \text{ Nm}$
<i>Recommended torque:</i>	<i>0.46 Nm to 0.69 Nm</i>
<u><i>Suitable cables:</i></u>	<i>LMR200</i>