



DRAWING

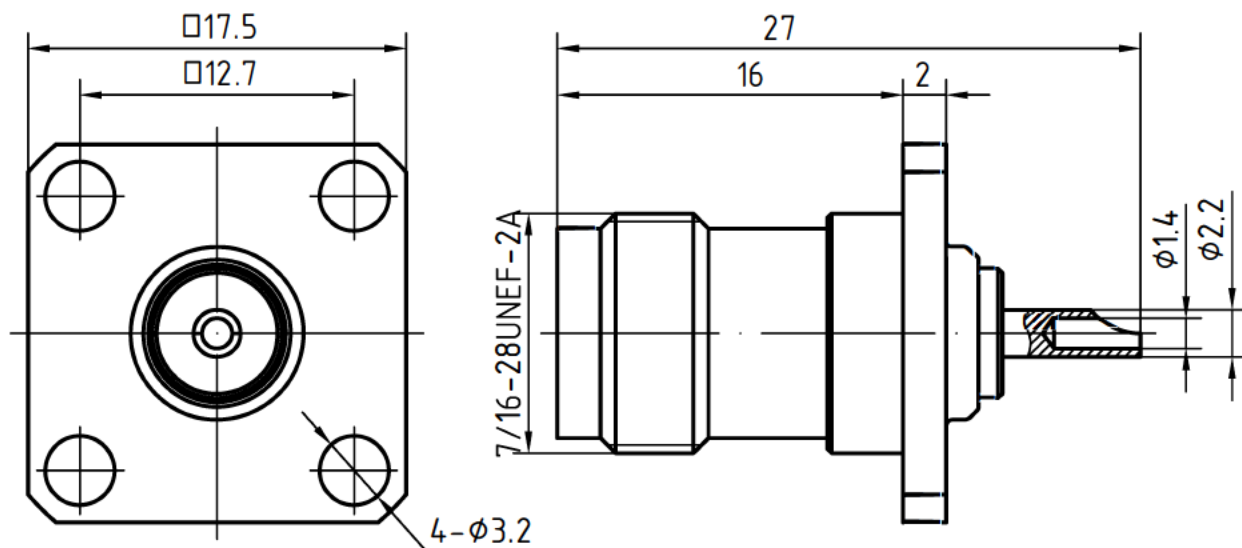

MOUNTING HOLE

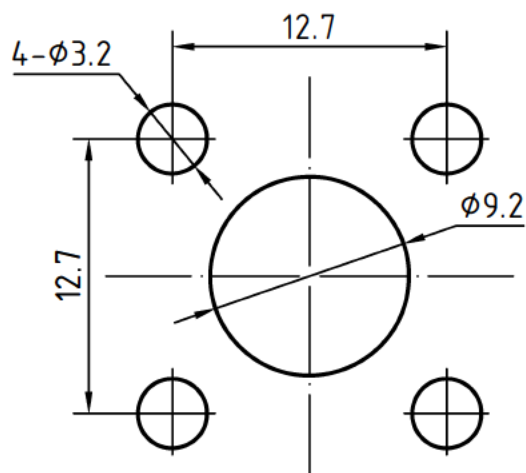

3	1	Body	Brass/Nickel plated	Nickel 5.0um over Copper 2.0um
2	1	Insulator	PTFE	
1	1	Center contactor	Phosphor bronze/Gold plated	Gold 0.2um over Nickel 2.0um
Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference

Designed by Xio Xang	Checked by Jing Lo	Approved by Jing Chan	File name TNC-232143(17.5)	Date 11.11.23	Scale 3 : 1
-------------------------	-----------------------	--------------------------	-------------------------------	------------------	----------------

RF CONNEC
excellent way of connect

TNC-232143(17.5)

Edition
1.0

Sheet
1/1

CHARACTERISTICS

DESCRIPTION:	TNC Type female FL connector
--------------	------------------------------

Electrical data:

Impedance:	50 ohm
Frequency range:	DC to 10.0 GHz
VSWR:	$\leq 1.10 + 0.05 \times f[\text{GHz}]$
Insertion loss:	$\leq 0.20 \times \sqrt{f[\text{GHz}]} \text{ dB}$
Insulation resistance:	$\geq 5000 \text{ M}\Omega$
Test voltage:	1500 V rms
Working voltage:	500 V rms
Contact resistance:	
1). Centre contact:	1.5 m Ω
2). Outer conductor:	1.0 m Ω
RF Leakage :	$\leq -(57-f[\text{GHz}])\text{dB}$

Environmental data:

Temperature rating:	-65 ° C to +165 ° C
2002/95/EC (RoHS):	Compliant

Mechanical data:

Mating cycles:	≥ 500
Center contact retention:	$\geq 18 \text{ N(axial)}$
Coupling test torque:	$\leq 1.7 \text{ Nm}$
Recommended torque:	0. 46Nm to 0.69 Nm

Suitable cables:

N/A