


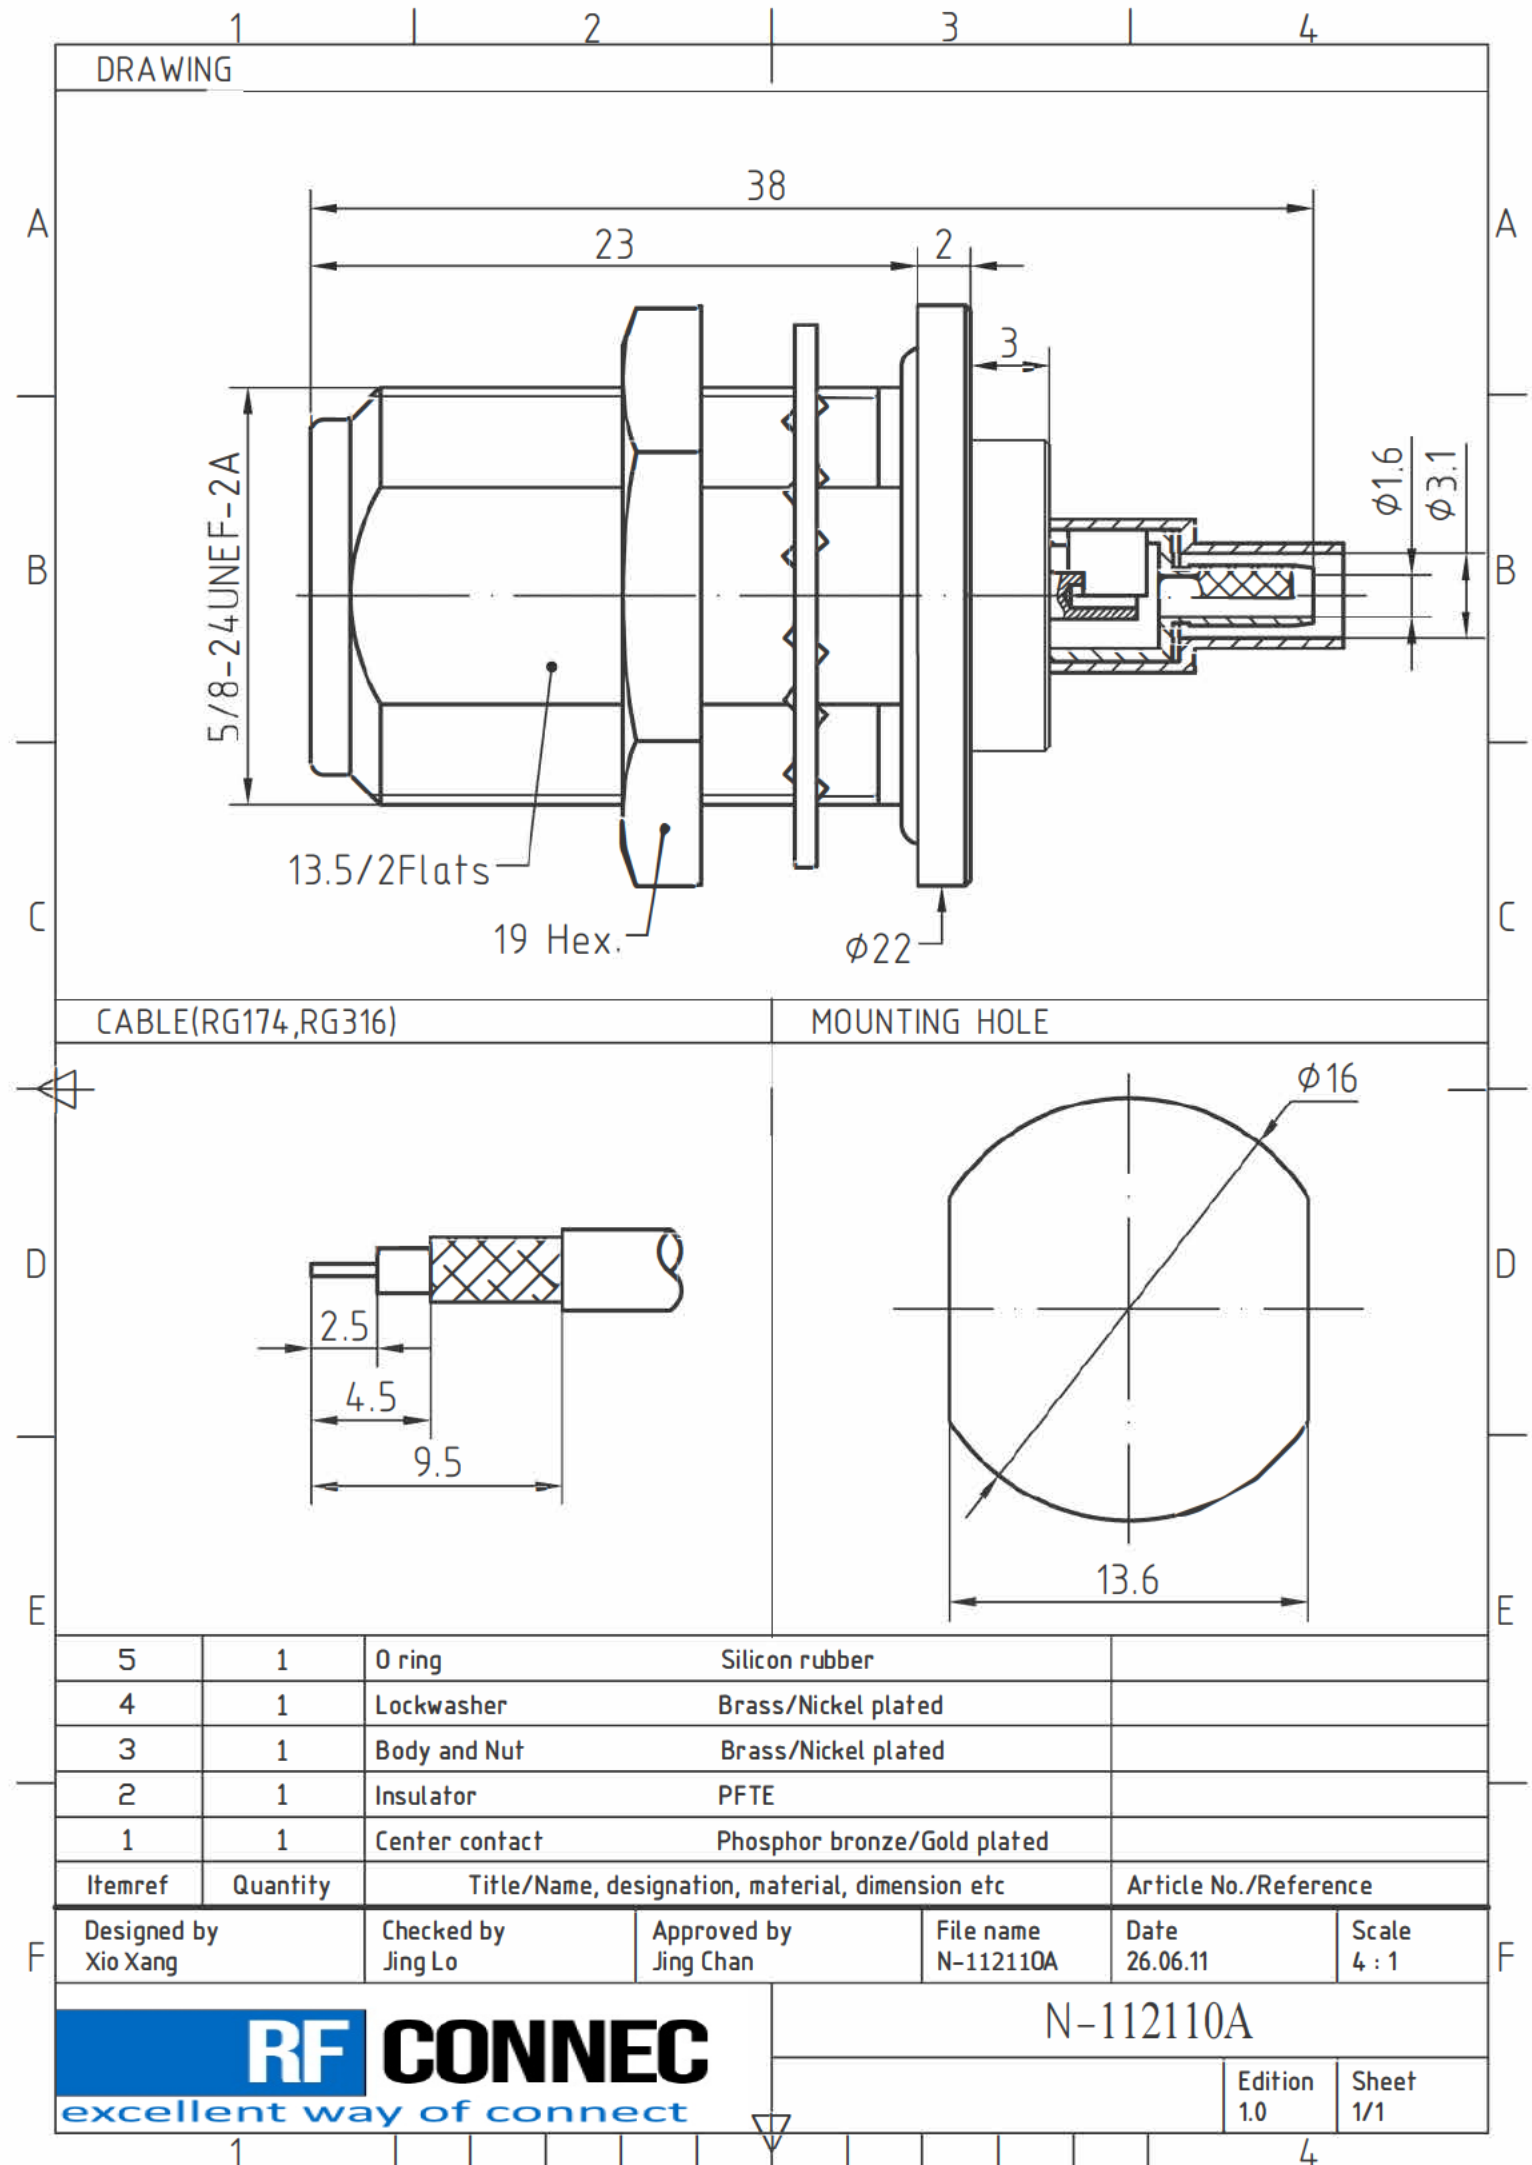

CHARACTERISTIC

DESCRIPTION	N Type female BH connector
N:	
<u>Electrical data:</u>	
Impedance:	50 ohm
Frequency range:	DC to 6.0
VSWR:	GHz $\leq 1.3 : 1$
Insertion loss:	≤ 0.25 dB
Insulation resistance: Test	$\geq 5000 M\Omega$
voltage: Working	2500 V rms
voltage: Contact	1400 V rms
1) Centre contact:	≤ 1.0
2) Outer conductor:	m Ω
Power handling (at 20 °C, sea level, VSWR 1.0):	100 W @ 1 GHz 700 W @ 2 GHz
- Limitations are possible due to the used cable type -	
<u>Environmental data:</u>	
Temperature rating:	-65 ° C to +165 °
2002/95/EC (RoHS):	C Compliant
<u>Mechanical data:</u>	
Mating cycles:	≥ 500
Coupling test torque:	≤ 1.7 Nm
Recommended torque:	0.7 Nm to 1.1 Nm
<u>Suitable cables:</u>	
RG174, RG316	